

IVANOV, V.B.

Unusual column of rime. Probl. Arkt. no. 3:113-114 '58.
(MIRA 12:1)

(Gukera Island--Ice)

Cracks on glaxier domes. Probl. Arkt. No. 5: 131-132 '58.
(MIRA 13:5)
(Gukera Island--Glaciers)

IVANOV, V.B.

Cytochemical study of the ratio between ribonucleic acid and proteins
in the protoplasm of growing root cells. Zhur. ob. biol. 22 no.2:
100-107 Mr-Ap '61. (MIRA 14:5)

1. Department of Plant Physiology, Moscow State University.
(PLANT CELLS AND TISSUES) (NUCLEIC ACIDS)
(PROTEINS)

IVANOV, V.B.

Use of bromophenol blue for the quantitative histochemical determination of proteins. No.1: Effect of the presence of nucleic acids and the fixative used on dye. TSitologija no.1:112-116 Ja-F'63. (MIRA 16:6)

1. Opticheskaya laboratoriya Instituta elementoorganicheskikh soyedineniy AN SSSR, Moskva i kafedra fiziologii rasteniy Moskovskogo universiteta.
(PROTEINS) (BROMOPHENOL BLUE) (NUCLEIC ACIDS)

IVANOV, V.B.

Dry snow classification applied to Arctic conditions. Uch. zap.
LGU no.317:180-189 '62. (MIRA 16:6)
(Arctic regions. Snow)

IVANOV, V.B.

Some problems in the methods of conducting winter practical training
for students of physical geography. Vest. LGU 19 no.18:112-113 '64.
(MIRA 17:11)

IVANOV, V.B.

Use of the electrocapillary method for making thin homogeneous
film-type sources covering large areas. Izv. AN Uz. SSR. Ser.
fiz.-mat. nauk 7 no.2:70-74 '63. (MIRA 16:6)

1. Institut yadernoy fiziki AN UzSSR.
(Radioactive substances) (Electrocapillary phenomena)

ACCESSION NR: AP3000224

S/0166/63/000/002/0070/0074

AUTHOR: Ivanov, V. B.

TITLE: Application of the electrocapillary method in the production of thin homogeneous radioactive films of large areal extent

SOURCE: AN UzSSR. Izv. Seriya fiziko-matem. nauk, no. 2, 1963, 70-74

TOPIC TAGS: radioactivity source, radioactive film source, electrocapillary radioactive source film, radioactive film, vacuum evaporation, cathode dispersion, organic film, metallic film, film

ABSTRACT: Improvements on the methods for producing radioactive films of large area and of a high degree of homogeneity are described. The method involves a combined vacuum-evaporation and cathode-dispersion technique. Organic films were coated on both sides with thin electrically conductive metal layers by the vacuum evaporation method. The device designed by the author for this purpose is presented in Fig. 1 of the Enclosures. These films were placed in a container (see Fig. 2 on Enclosure 2) where they were coated with radioactive solution (by

Card 1/62

ACCESSION NR: AP3000224

the electrocapillarity method). The results were checked directly by studying the distribution of the fission fragments with respect to energies involved. These results are presented graphically in Fig. 3, on the Enclosures. Orig. art. has: 1 table and 3 figures.

ASSOCIATION: Institut yadernoy fiziki AN UzSSR (Institute of Nuclear Physics AN UzSSR)

SUBMITTED: 20Jan63

DATE ACQ: 12Jun63

ENCL: 03

SUB CODE: PH

NO REF SOV: 002

OTHER: 003

Card 2/62

GANEV, G.G.; IVANOV, Vl.B.

Development and activity of the Psychoneurological Research Institute
in Bulgaria. Zhur. nevr. i psikh. 60 no.11:1529-1536 '60.
(MIRA 14:5)

1. Direktor Nauchno-issledovatel'skogo psikhonevrologicheskogo
instituta, Sofiya, Bolgariya (for Ganev). 2. Zamestitel' direktora
po nauchnoy chasti Nauchno-issledovatel'skogo psikhonevrologicheskogo
instituta, Sofiya, Bolgariya (for Ivanov).
(BULGARIA—NEUROPSYCHIATRY)

IVANOVA, L.T.; IVANOV, VI.B.

Changes in the higher nervous activity under the effect of the reproductive cycle. Zhur.vys.nerv.deiat. 14 no.6:984-991 N-D '64.
(MIRA 1536.)
1. Chair of Psychiatry, Higher Medical Institute, Varna, Bulgaria

IVANOV, V.9.

Application of bromophenol blue for quantitative histochemical determination of protein. Report No.2: Cause of varied staining affinity in corn root tip cells of various ages. Tzitologiya 5 no.4(1970-71) 11-14 (vol. 17:8)

1. Opticheskaya laboratoriya Instituta elementno-organicheskikh soedinenii i N SSSR, Moskva i kafe'dra fiziologii rastenii Moskovskogo gosudarstvennogo universiteta.

IVANOV, V.B.

Application of bromophenol blue for quantitative histochemical determination of proteins. Report No.2: Cause of varied staining affinity in corn root tip cells of various ages. Fiziologija 5 no.2:270-275 Jl-ag '62. (FIZ' 17:8)

U. S. Pecherskaya laboratoriya Instituta elementoorganicheskikh soedinenii i N SSSR, Moskva i kafedra fiziology rastushchego Moscowvskogo gosudarstvennogo universiteta.

BRCDSKIV, V.Ya.; IVANOV, V.B.; NECHAYEVA, N.V.

Direct participation of the cell nucleus in the secretory protein
of the parotid salivary gland. Dokl. AN SSSR 157 no. 2:443-446
Jl '64. (MIRA 17:7)

1. Institut morfologii zhivotnykh imeni A.N.Savertsova AN SSSR i
Institut elementoorganicheskikh soyedineniy AN SSSR. Predstavлено
akademikom A.N.Belozerskim.

IVANOV, V.D., inzh.

Using a trough feeder and a vibrating spout for dehydrating
crushed stone. Stroi.mat. 9 no.3:25 Mr '63. (MIRA 16:4)
(Stone, Crushed--Drying)

IVANOV, V.D., gornyy inzh.

Concentration of middlings and fine ores and sands in a
spiral sluice. Gor.zhur. no.5160-62 My '62. (KEM 1681)

1. Irkutskiy nauchno-issledovatel'skiy institut redkikh
metallov, Irkutsk.
(Ore dressing) (Sluices—Testing)

IVANOV, V.D., dots.; POKOTILO, V.P., dots.; KONOPELEV, P.S., st.
prépod.; AKSENOV, A.A., assis.; KLYKOV, K.S., assis.;
MART'YANOVA, L.I., tekhn. red.

[Reference book on sawing lumber materials] Posobie po ra-
skroiu pilovochnogo syr'ia. Arkhangel'sk, Arkhangel'skoe
knizhnoe izd-vo, 1962. 104 p. (MIRA 16:4)

1. Nauchno-tehnicheskoye obshchestvo lesnoy promyshle-
nosti. Arkhangel'skoye oblastnoye pravleniye. 2. Kafedra le-
sopil'no-strogal'nykh proizvodstv Arkhangel'skogo lesotekhni-
cheskogo instituta (for all except Mart'yanova).
(Hardboard)

IVANOV, V.D.

ZHIDOVICH, A.I., kandidat tekhnicheskikh nauk; VARGA, R.Sh., kandidat tekhnicheskikh nauk; PUKS, I.I.; IVANOV, V.D., glavnnyy konstruktor; TRUSHIN, Ye.M., inzhener-tehnolog.

Instrument for testing the balance of flyer guides. Tekst.prom.
14 no.6:32-34 Je 154. (MIRA 7:7)

1. Glavnnyy inzhener zavoda im. 1 Maya (for Puk) (Spinning machinery)

112-57-7-14883

Translation from: Referativnyy zhurnal, Elektrotehnika, 1957, Nr 7, p 155 (USSR)

AUTHOR: Zhidovich, A. I., Varga, R. Sh., Fuks, I. I., Ivanov, V. D., and
Trushin, Ye. M.

TITLE: Device for Checking the Dynamic Balancing of PBR-1 Rove Flyers, TsNII
Mashdetal' System (Pribor dlya proverki dinamicheskoy balansirovki
rovnichnykh rogulek PBR-1 sistemy TsNII Mashdetali)

PERIODICAL: Nauch.-issled. tr. Tsentr. n.-i. in-t vspomogat. izdeliy i zapas
detaley k tekstil'n. oborud., 1956, Nr 4, pp 32-44

ABSTRACT: Bibliographic entry.

Card 1/1

IVANOV, Vladimir Dmitriyevich; KAZAKEVICH, Yevgeniy Pavlovich; GORODENSKIY,
L.M., red.; BOHUNOV, N.I., tekhn.red.

[Hydroelectric power resources of the Chinese People's Republic
and their use] Gidroenergeticheskie resursy Kitaiskoj Narodnoj
Respubliki i ikh ispol'zovanie. Moskva, Gos.energ.izd-vo, 1960.
47 p.

(MIRA 13:7)

(China—Hydroelectric power)

IVANOV, V. B.

"The Histochemistry of Protein in Corn Root Tips."

report submitted for the First Conference on the problems of Cyto and
Histochemistry, Moscow, 19-21 Dec 1960.

Institute of Elementary Organic Compounds Academy of Sciences USSR, Moscow.

IVANOV, V.D., student V kursa

Investigation of a junction transistor blocking oscillator.
Sbor. stud. nauch. rab. LEIS no.1:24-31 '59. (MIRA 13:4)

1. Leningradskiy elektrotekhnicheskiy institut svyazi imeni
prof. M.A. Bonch-Bruyevicha.
(Oscillators, Electric) (Transistors)

COVERAGE: The papers presented at the 1958 conference of the Scientific Student Society of the Institute concerned such new problems as electronic automatic telephone exchanges, electronic computers, colored television, and electronic telegraph. This collection contains 12 articles which were selected from the 90 papers submitted at the conference. No personalities are mentioned. References accompany most of the articles.

9.6100

20040

S/146/61/004/001/004/016
B104/B215

AUTHOR: Ivanov, V. D.

TITLE: Energy relations in oscillating systems

PERIODICAL: Izvestiya vysshikh uchebnykh zavedeniy. Priborostroyeniye,
v. 4, no. 1, 1961, 31-35

TEXT: For practical reasons, electrotechnical methods are applied in the theory of oscillation of mechanical systems, i.e. calculation with complex quantities. For examinations of oscillating systems, the author applied the method of dynamic rigidity, i.e. the analogy between mechanical and electrical quantities was utilized. The properties of elements under the action of force are expressed by complex quantities. This, however, is the reason why the physical meaning of complex representations of forces, velocities, and displacements has not been so far understood completely. Some papers are mentioned in which oscillations of mechanical systems are studied, but the above problem is only superficially dealt with, or completely ignored. L. I. Gutemakher

Card 1/5

20040

S/146/61/004/001/004/016
B104/B215

Energy relations in oscillating ...

attempted to explain the nature of active and reactive components of mechanical quantities by projecting the vector concerned onto the coordinate. In his contribution to this problem, the author starts with a very simple mechanical system of oscillations consisting of a mass fixed to a spring and performing damped oscillations. The differential equation of this system is expressed by Eq. (1).

$$M \frac{dv}{dt} + hv + \frac{1}{e} \int v dt = F_m \sin \omega t = f. \quad (1)$$

The velocity is expressed by the relation $v = V_m \sin(\omega t - \varphi)$; the expressions for V_m and $\tan \varphi$, can easily be derived from (1). The expressions

Card 2/5

2001.0

S/146/61/004/001/004/016
B104/B215

Energy relations in oscillating ...

$$F_h = h v = h v_m \sin(\omega t - \varphi); \quad (3)$$

$$F_M = M \frac{dv}{dt} = \omega M v_m \sin\left(\omega t - \varphi + \frac{\pi}{2}\right); \quad (4)$$

$$F_e = \frac{1}{e} \int v dt = \frac{v_m}{\omega e} \sin\left(\omega t - \varphi - \frac{\pi}{2}\right). \quad (5)$$

are given for the force of elasticity F_h , inertia force F_M , and power or resistance F_e . By multiplication of Eq.. (1) by $v dt = dx$, the author obtains the following expression for elementary work: $\int v dt = hv^2 dt + Mvdv + xdx/e = hv^2 dt + d(W_K + W_p)$. From it the expressions for the rate P_h of the irreversible transformation of energy

Card 3/5

20040

S/146/61/004/001/004/016
B104/B215

Energy relations in oscillating ...

(friction), and the rate P_r of reversible transformations of energy (kinetic and potential energies) are obtained. In electrical engineering they are called active and reactive powers.

$$P_h = VF \cos \varphi [1 - \cos(2\omega t - 2\varphi)]; \quad (A)$$

$$P_p = P_a + P_r = VF \sin \varphi \sin(2\omega t - 2\varphi). \quad (A)$$

The reactive power can be given as harmonic function, which characterizes the reversible process. This introduction of reactive and active elements and powers into the theory of mechanical oscillations allows the application of methods of dynamic rigidity in the study of mechanical systems. The analysis of energy expressions derived by V. V. Davydov in his work is given as an example for the applicability of this symbolic method. I. M. Tetel'baum, L. S. Evgenson, N. N. Andreyev, V. V. Davydov, and Yu. I. Iorish are mentioned. The publication of this article was recommended by the Kafedra avtomatiki i

Card 4/5

20040

S/146/61/004/001/004/016
B104/B215

Energy relations in oscillating ...

telemekhaniki LITMO (Department of Automation and Telemechanics of the LITMO). There are 1 figure and 10 Soviet-bloc references.

SUBMITTED: June 27, 1960

X

Card 5/5

IVANOV, V.D.

4/19/73/00/04/020/020
R0513

AUTHOR: Edobashin, V.E.
TITLE: The Scientific-Technical Conference at Khar'kov
Aviation Institute

PERIODICAL: Vestniva vynoshivk uchebnykh svedeniy, Aviatonnaya tekhnika, 1959, Nr. 4, pp 161-165 (USSR)
ABSTRACT: In May 1959, the 16th Conference of Professional and Teaching Staff took place.

Stranich of Aircraft Section. On the Theory of Bending of Thin-Walled Columns by Doseat. Candidate of Technical Sciences L.A. Polikarpov.

"The Simulation of Static Experiments on Thin-Walled Structures" by Candidate of Technical Sciences L.A. Polikarpov.

"The Binding of Beams Framing in Opening" by Candidate of Technical Sciences L.A. Polikarpov.

The Influence of the Rigidity of Ribs and Beams on their Binding by Assistant M.A. Chelomov.

"The Calculation of the Bending of Rectangular Plates by the Discrete Method" by Assistant Yu.P. Paton.

"The Calculation of Cylindrical Shells" by Doctor of Sciences V. A. Slobodchikov.

"The Binding of Beams Variable in Curvature" by Assistant N.I. Ovchinnikov.

"The Choice of a Method of Modelling of Aerostatic Processes" by Assistant V.V. Slobodchikov.

"An Investigation of the Process of Positioning by an Abrasive Wheel" by Senior Instructor, Candidate of Technical Sciences U.N. Terzuk.

"The Calculation of the Operation of a Pneumatic-Hydraulic Press by Assistant J.J. Bilyayev."

"A Static Analysis and Calculation of the Accuracy of the Technological Processes of Machining" by O.M. Prikhodenko.

"The Automatic Welding of Long Panels" by Candidate of Technical Sciences I.P. Korotov.

"Prospects in the Use of Specialized Computers for the Determination of the Optimum Geometry of Cutting Tools" by Doctor, Candidate of Technical Sciences V.P. Kukharovsky.

"The Spreading of the Experience of Inventors and the Classification of Organizations of Technical Measures in Machine Constructions" by Senior Instructor M.H. Asenovich.

"Measurable Abrasion of a Cutting Tool in Pine Sharpening" by Assistant V.M. Balkov.

"An Investigation of the Process of Coagulation of High Velocities of Water" by Doctor, Candidate of Technical Sciences A.K. Baranov.

"The Standardization of Vibration Effects on the Human Organism in Aircraft Production" by Senior Instructor V.D. Kostylev.

"The Theory and Construction of Aircraft Engines and Propulsion-Driveline Machines Facilities. The Investigation of the Flow Between the Inlet and Outlet Valves of a Turbine" by Instructor, Candidate of Technical Sciences V.N. Yershov.

"The Variation in the Stage Parameters of an Axial Compressor in Accordance with the Size of the Radial Clearance" by Assistant M. Dzhemalov.

"On the Problem of Non-Stationary Heat Transfer" by Assistant S.O. Prolov.

"The Influence of an Electric Field on the Flame of a Burner" by Senior Engineer P.P. Bochenok.

"Calculation of the Temperature Compensation of Contactless Pressure Pickups" by Assistant L.M. Astaf'yev.

"Aerohydrodynamics" by Assistant V.L. Tikhonov.

"The Control of the Boundary Layer" by Assistant V.I. Kholod.

"The Application of the Landing Edge" by Assistant V.S. Zhdanov.

"The Application of Gas-Hydraulic Analogy and its Application" by Senior Instructor D.A. Brusnitsyn.

"The Aerodynamic Investigation of Wind Tunnel" by Senior Engineer G.I. Fomichev.

"Small Reynolds Numbers" by Engineer G.I. Fomichev.

SOV/68-59-3-13/23

AUTHORS: Ivanov, V.D., and Ostroushko, V.D.

TITLE: Mechanised Storage Tanks for Coal Tar (Mekhanizirovannoye khranilishche dlya smoly)

PERIODICAL: Koks i Khimiya, 1959, Nr 3, pp 53-54 (USSR)

ABSTRACT: A self cleaning storage tank designed by the authors (fig.1) is described. The principle of the cleaning mechanism is similar to that of self cleaning tar decantation tanks. Two such tanks were erected on the Makeyevka Works in March 1958. There is 1 figure.

ASSOCIATION: Makeyevskiy koksokhimicheskiy zavod (Makeyevka Coking Works)

Card 1/1

NOVOZHILOV, M.G., doktor tekhn. nauk; DRUKOVANYY, M.F., kand. tekhn. nauk;
IVANOV, V.A., inzh.; IL'IN, V.I., inzh.; OKSANICH, I.F., inzh.

Effect of blasting in a compressed medium on the technology of
ore mining and ore dressing. Vzryv. delo no.57/14:128-145 '65.
(MIRA 18:11)

1. Filial Instituta mekhaniki AN UkrSSR (for Novozhilov,
Drukovanyy, Ivanov, Il'in). 2. Yuzhnnyy gornoobogatitel'nyy
kombinat (for Oksanich).

BARSKIY, V.Ya.; IVANOV, V.B.; PUSHAKOVA, T.K.

Luminescence microscopic study of the distribution and accumulation
of proteins in plant roots. Izv. AN SSSR. Ser. biol. no.6:916-921
(MIRA 18:11)
N-D '65.

1. Institut molekulyarnoy biologii AN SSSR i Opticheskaya labora-
toriya Instituta obshchey i neorganicheskoy khimii im. N.S.
Kurnakova AN SSSR.

IVANOV, V. D. Engineer

Cand Tech Sci

Dissertation: "Investigation of the Wear and Strength of Round-Welded
Traction Chains Used in Timber-Hauling Machines."

23/5/49 23 May 49

Moscow Forestry Engineering Inst

SO Vecheryaya Moskva
Sum 71

IVANOV, V.D., inzhener.

Bunker-type cable pickup.Terf.prem.33 no.6:12-14 '56. (MLRA 9:10)

1.Sverdlevskiy rementne-mekhanicheskiy zaved.
(Electric cables)

IVANOV, V.D.

Certain factors determining the operation of a bunker-type cable-stowing mechanism. Torf. prom. 34 no. 4:20-21 '57. (MLRA 10:6)

1. Ryazanskiy pedagogicheskiy institut.
(Electric cables)

IVANOV, V.D.

Bunker-type cable layer. Torf.prom. 34 no.6:32-33 '57. (MIRA 10:12)

1. Ryazanskiy pedagogicheskiy institut.
(Electric cables)

IVANOV, V. S.,

"Device for Combination Testing of Valve-type Lightning Arresters," with IVATSIK,
Ye. Ye., NASHATYR', V. M., p 511.

High Voltage Technique, Moscow, Gosenergoizdat, 1958, 664pp
(Series: Iz Trudy, No. 195)

This collection of articles sums up the principal results of investigations and studies made by Prof. A. A. Gorev, Dr. Tech. Sci., and his staff in the field of high voltage phenomena and techniques at LPI (Leningrad Polytech Inst.). It was at this institute that Prof. Gorev completed his higher scientific education and then taught and carried on his investigations in the field until his death in 1953. In 1956, by decree of Min of Higher Education, the High-Voltage Lab. at LPI was named after A. A. Gorev.

IVANOV, V.D.; CHERNE, Kh.I., dots., oty. red.; GAL'CHINSKAYA,
V.V., tekhn. red.

[Manual for term papers on the theory of electrical communication] Uchebnoe posobie k kursovoi rabote po teorii elektricheskoi sviazi. Pod red. Kh.I.Cherne. Leningrad, Leningr. elekrotekhnicheskii in-t sviazi, 1963. 75 p.
(MIRA 17:2)

L 29115-66 -- INT(m)

ACC NR: AP6019406

SOURCE CODE: UR/0240/65/000/011/0115/0119

26
BAUTHOR: Kirichenko, V. N.; Ogorodnikov, B. I.; Ivanov, V. D.; Kirsh, A. A.; Kachikin, V. I.

ORG: none

TITLE: Content of submicroscopic aerosols of short-lived daughter products of radon
in mine air

19

SOURCE: Gigienika i sanitariya, no. 11, 1965, 115-119

TOPIC TAGS: industrial hygiene, aerosol, radon, atmospheric contamination, mining engineering

ABSTRACT: The atoms of daughter products formed from radon in atmospheric air settle on non-radioactive aerosol particles because of their great mobility, but some of them remain free due to continuous formation. The presence of such atoms in the air may result in unequal distribution of the radiation dose absorbed by the miners' respiratory tract and lungs. Therefore, to assess the harmfulness of mine air, it is essential to have reliable data on the content of the free atoms of the short-lived daughter products of radon under actual production conditions as well as on the factors that affect the quantity thereof.

Card 1/2

UDC: 613.648:622.411:516.296-1347

L 29115-66

ACC NR: AP6019406

The authors found these free atoms almost everywhere in the mine investigated. There was a clear-cut relationship between the quantity and the operations that created aerosols. When no work was going on in cleaning spaces, the free atoms were more abundant than when work was in progress, amounting to 88% in case of ventilation with clean atmospheric air.

The results did not apply solely to free atoms because the authors' method was not selective in this respect. In point of fact, they dealt not only with free atoms but with a spectrum of very small particles similar to the former in size. However, since these particles readily settle with the free atoms on various objects, they may well be the reason for the overirradiation of the respiratory tract of miners. Orig. art. has: 1 figure, 2 formulas, and 3 tables.

[JPRS]

SUB CODE: 06, 38, 08 / SUBM DATE: 23Dec63 / ORIG REF: 007 / OTH REF: 003

Card 2/2 (U)

ACC NR: AR6026490

SOURCE CODE: UR/0274/66/000/004/A030/A031

AUTHOR: Ivanov, V. D.

TITLE: Planar electromagnetic wave in an anisotropic dispersionless nonlinear medium

SOURCE: Ref. zh. Radiotekhnika i elektronika, Abs. 4A196

REF SOURCE: Tr. uchebn. in-tov svayzi. M-vo svyazi SSSR, vyp. 26, 1965, 15-22

TOPIC TAGS: electromagnetic wave, anisotropic medium, electromagnetic wave dispersion

ABSTRACT: A theory is set forth of transmission of a planar electromagnetic wave in a transparent anisotropic dispersionless nonlinear medium describable by a nonlinear wave equation. A solution of this equation yields a correct notion about the distribution of energy among the harmonics. The exact solution for a dispersionless medium can be used for obtaining approximate solutions of nonlinear wave equations covering dispersing and slightly-absorbing media; these solutions are based on the theory of disturbance. If the phase velocities of all harmonics are equal, a dispersion of the energy of the initial monochromatic radiation must be observable in an infinite discrete frequency spectrum; the maximum coefficient of conversion of the first-harmonic radiation power into the second-harmonic radiation power does not exceed 1% in this case. One figure. Bibliography of 8 titles. A. K. [Translation of abstract]

20/

SUB CODE: 47-00-

Card 1/1

UDC: 621.317.19

ACC NR: AT6036192

SOURCE CODE: UR/3116/66/277/000/0162/0164

AUTHOR: Bychkov, N. F.; Ivanov, V. D.

ORG: none

TITLE: Using punch card readers in the Ural-2 computer system

SOURCE: Leningrad. Arkticheskiy i antarkticheskiy nauchno-issledovatel'skiy institut. Trudy, v. 277, 1966. Chislennyye metody issledovaniya gidrometeorologicheskikh usloviy v Arktilke s ispol'zovaniyem elektronnykh tsifrovых vychislitel'nykh mashin. (Numerical methods of studying hydrometeorological conditions in the Arctic with the use of electronic computers), 162-164.

TOPIC TAGS: computer input unit, punched card, data readout, digital computer, hydrometeorology /Ural-2 computer

ABSTRACT: To increase the effectiveness of the Ural-2 digital computer used for processing hydrometeorological data at the Arctic and Antarctic Scientific Research Institute the previously introduced 210 card/min card reader input has been modified to accept punchcard computer cards directly. Ural-2 normally accepts 40-bit words which are coded on each card row starting with column 20 and ending with column 59. The punchcard computer cards have information coded starting with column 1 and ending with column 80. To permit the punchcard

Card 1/2

ACC NR: AT6036192

computer cards to be read by the same card reading unit the card brush terminals were rewired. The modifications associated with this circuit change are described. The altered card input is more suitable for entry of a large quantity of hydrometeorological data than the previous card reader. Its average speed is three times that of the earlier reader. [WA-81, Rpt. 9]

SUB CODE: 09/ SUBM DATE: none

Card 2/2

IVANOV, V.D.

Accelerated mass determination of the volume weight and
the ice content of water saturated permafrost grounds.
Pochvovedenie no.10:109-110 O '65. (MIRA 18:11)

1. Abalkanskiy filial Respublikanskogo gosudarstvennogo
instituta po proyektirovaniyu vodokhozyaystvennogo i
meliorativnogo stroitel'stva RSFSR.

L 4022-66 EWT(d)/EWT(f)/EWT(m)/EWP(w)/EWP(v)/T/EWP(t)/EWP(k)/EVA(h)/EWA(c)
ACCESSION NR: AP5022253 LJP(c) UR/0363/65/001/007/1090/1097
JD/HM/EM/AT 537.311.33+546.3

AUTHOR: Krasulin, Yu. I.; Ivanov, V. D.; Kruglov, L. M.

TITLE: Role of dislocations in the formation of joints during pressure welding
with heating of the metal and semiconductor

SOURCE: AN SSSR. Izvestiya. Neorganicheskiye materialy, v. 1, no. 7, 1965,
1090-1097

TOPIC TAGS: pressure welding, crystal dislocation, semiconductor device

ABSTRACT: Metal conductors were welded to silicon single crystals onto which a pyrex plunger was pressed to simulate pressure welding. It is found that during pressure welding involving the heating of the metal conductors with the semiconductor, dislocations are formed on the surface of the semiconductor in the area of its contact with the metal. Chemical bonds between the metal and the semiconductor are formed at points where the dislocations emerge to the surface of the semiconductor. The number of dislocations formed in the surface layer of the semiconductor depends on the welding parameters: temperature, pressure, and duration. At low temperatures and short durations lasting less than the incubation period, the weld joint between metal conductors and semiconductors is

Card 1/2

L 4022-66

ACCESSION NR: AP5022258

formed owing to adhesive forces (van der Waals and mechanical bonding). Orig.
art. has: 6 figures.

ASSOCIATION: none

SUBMITTED: 22Mar65

ENCL: 00

SUB CODE: MM, SS

NO REF Sovr: 013

OTHER: 006

Card *mde* 2/2

IVANOV, V.D.

Standardization of lumber packages. Biul.tekh.ekon.inform.Gos.
nauch.-issl.inst.nauch.i tekh.inform. 17 no.10 1968, 0 16.
(MIRA 18:4)

IVANOV, V.D., kand. tekhn. nauk

Standardization of lumber packages. Der. prom. 15 no.1:3 Ja '66.
(MIRA 19:1)

1. TSentral'nyy nauchno-issledovatel'skiy institut mekhanicheskoy
obrabotki drevesiny.

YARKOVOY, V.S.; IVANOV, V.D.

Structure of the transition zone during the welding of
dissimilar steels. Metalloved. i term. obr. met. no. 6:
48-50 Je '64. (MIRA 17:7)

IVANOV, V.F., zasluzhennyj deyatel' nauki tekhniki, doktor tekhn.nauk, prof.

Research work of the wood and plastic elements department. Sbor.
nauch. trudov LISI no.34:3-5 '61. (MIRA 15:8)
(Wood research) (Plastics--Research)

SOV/99-59-6-6/13

14(10)

AUTHOR: Ivanov, V.F., Engineer

TITLE: A Method to Cement the Space Behind the Casing Pipes
in Drilling Artesian Wells

PERIODICAL: Gidrotekhnika i melioratsiya, 1959, Nr 6, pp 30-34,
(USSR)

ABSTRACT: The author describes a new method to cement the space behind the casing pipes in drilling artesian wells, developed jointly by the author and Engineer V.D. Radyukov of the Uzbek Pasture, Soil Improvement, and Construction Trust in 1958. The cementation of the space behind the casing is essential for full insulation of the water-bearing stratum from the impermeable strata located above. The cement solution is as water-tight as marlaceous clay which often serves as a roof for high-pressure, water-bearing strata. The cementation offers the following advantages: dependable service of artesian wells, im-

Card 1/3

SOV/99-59-6-6/13

A Method to Cement the Space Behind the Casing Pipes in Drilling
Artesian Wells

proved sanitary conditions with better drinking water, water jet regulation, substantial saving in steel pipes, and long well service with no extra repair costs. Thus, the Golodnosteneskaya burovaya ekspeditsiya (Golodnaya Steppe Drill Expedition), which plans to drill 80 artesian wells with a total depth of 15,000 m, saved more than 100 tons of steel pipes in 1958. The cementation is carried out by ZIF-200/40 and NG-150/30-type pumps serving as accessories for URB-ZAM and AVB-3-100, AVB-T, and AVB-400-type drilling machines respectively. The author then gives a detailed description of the cementation gear and gives an example of how the amount of cement needed can be calculated. There are 3 diagrams and 1 table.

Card 2/3

SOV/99-59-6-6/13

A Method to Cement the Space Behind the Casing Pipes in Drilling
Artesian Wells

ASSOCIATION: Uzbekskiy pastbishchno-meliorativno-stroitel'nyy
trest (Uzbek Pasture, Soil Improvement, and Construction
Trust)

Card 3/3

IVANOV, VLADIMIR FEDOROVICH.

Problemy dolgovechnosti dereviannykh konstruktsii. Moskva, Gos. izd-vo stroit. lit-ry, 1950. 134 p. illus.

Bibliographical footnotes

Problems of the lasting qualities of wooden structures.

DLC: TA420.I9

SO: Manufacturing and Mechanical Engineering in the Soviet Union, Library of Congress, 1953.

IVANOV, Vladimir Fedorovich, professor, doktor tekhnicheskikh nauk;
PLESHEKOV, P.P., professor, doktor tekhnicheskikh nauk, retsenzent;
KAPLAN, M.Ya., redaktor izdatel'stva; PUL'KINA, Ye.A., tekhnicheskiy redaktor

[Wooden structures] Derevianyye konstruktsii. Leningrad, Gos.
izd-vo lit-ry po stroit. i arkhitekture, 1956. 316 p. (MLRA 9:11)
(Building, Wooden)

GINZBURG, Ye.I., mekhanik; IVANOV, V.F.; SMOTRITSKIY, P.A., slesar'

Clamps for prestressing reinforcing bars. Suggested by Ye.I.
Ginzburg, V.F. Ivanov, P.A. Smotritskii. Rats.i izobr. predl.v stroi.
no.13:12-14 '59. (MIRA 13:6)

1. Stroitel'nyy trest No.10 Ministerstva stroitel'stva BSSR (for
Ginzburg). 2. Ma shinoprovodnaya baza tresta No.10 Ministerstva
stroitel'stva BSSR (for Smotritskiy). 3. Instruktor Orgstroya
(for Ivanov).
(Reinforcing bars)

IVANOV, V.F.; PAVLOVICH, S.A.

Strength of laminated wood plastics used in the building industry.
Plast.massy no.4:34-38 '61. (MIRA 14:4)
(Plastics—Testing) (Building materials)

IVANOV, V.F.; NIKIFOROV, Ye.G.

Computation of tidal currents by Hansen's method. Trudy AANII
210:249-272 '61. (MIRA 14:11)
(Arctic regions--Tides)

AYZENSHTEYN, Il'ya Markovich; IVANOV, Valentin Filippovich; KIRAKOZOVA,
N.Sh., red.; MAMONTOVA, N.N., tekhn. red.

[Progressive forms of trade in consumers' goods] Progressivnye
formy torgovli promyshlennymi tovarami. Moskva, Gostorgizdat,
1962. 102 p. (MIRA 16:3)
(Retail trade--Equipment and supplies)

AISTOV, N.N., prof., doktor tekhn. nauk; VASIL'YEV, B.D., prof., doktor tekhn. nauk; IVANOV, V.F., prof., doktor tekhn. nauk; SAKHNOVSKIY, K.V., prof., doktor tekhn. nauk; SMIRNOV, N.A., prof.; ORLOV, A.I., dots., kand. tekhn. nauk; SHIFRIN, S.M., prof., doktor tekhn. nauk; Prinimali uchastiye: AKIMOVA, L.D., kand. tekhn. nauk, dots.; SPIRIDONOVA, O.M., kand. tekhn. nauk, dots.; MAKUKHIN, V.L., nauchnyy red.; STAROVOYTOV, I.F., inzh., red. izd-va; PUL'KINA, Ye.A., tekhn. red.

[The history of building practices] Istoriia stroitel'noi tekhniki. [By] N.N.Aistov i dr. Pod obshchei red. V.F.Ivanova. Leningrad, Gosstroizdat, 1962. 560 p. (MIRA 15:12)

1. Chlen-korrespondent Akademii stroitel'stva i arkhitektury SSSR (for Vasil'yev, Sakhnovskiy).

(Building)

MOCHESHNIKOV, N.I.; IVANOV, V.F.; PETRENKO, V.V.

Tuning magnetically saturated sondes with doubling of frequency.
Prib.i tekhn.eksp. no.4:147-148 Jl-Ag '60. (MIRA 13:9)

1. Fiziko-tehnicheskiy institut AN USSR.
(Magnetic instruments)

21.2/00

8736
S/120/60/000/004/002/020
E032/E414

AUTHORS: Grishayev, I.A., Mocheshnikov, N.I. and Ivanov, V.F.

TITLE: Measurement of the Position and Current of a Pulsed Beam of Charged Particles

PERIODICAL: Pribory i tekhnika eksperimenta, 1960, No.4, pp.17-23

TEXT: The control of the position and current of a charged particle beam is of particular importance in the case of charged particle accelerators, for example linear accelerators, where the beam must not deviate from the "axis" by more than 1 or 2 mm. Moreover, the position and current indicator should not affect the beam, i.e. it should not reduce its intensity, increase its divergence etc. It is claimed that all the beam position indicators described so far do not satisfy these requirements. For example, the pickup electrodes used in the cosmotron (Swartz, Ref.1) were too large and not sufficiently sensitive for use with electron linear accelerators. In the Stanford electron linear accelerator (Chodorow et al, Ref.2) the beam position indicator was in the form of a series of neutron counters and these are also claimed to be unsatisfactory because they detect only large deflections of the beam. The present authors have therefore

Card 1/5

87363
S/120/60/000/004/002/028
E032/E414

Measurement of the Position and Current of a Pulsed Beam of Charged Particles

developed position and current indicators for pulsed beams which are based on the magnetic interaction between special coils in the neighbourhood of the beam and the beam itself. The principle of the method is illustrated in Fig.1, in which the first diagram shows the beam position indicator and the other two diagrams show the beam current indicators. In Fig.1a, the two coils n_1 and n_2 have identical parameters so that when the beam is displaced along the X-axis the emf induced in one of the coils will increase and that in the other coil will decrease. When the beam is in the central position, the signals induced in the two coils are equal. If the two coils are connected in opposition, as shown in Fig.1b, the signal will be zero whenever the beam is central. When the beam is displaced along the X-axis, the polarity of the output signal will depend on whether the beam is deflected to the right or to the left, while the magnitude of the signal will depend on the magnitude of the beam displacement. In order to record displacements in two mutually perpendicular directions, two pairs

Card 2/5

E7969
S/120/60/000/004/002/048
E032/E414

Measurement of the Position and Current of a Pulsed Beam of Charged Particles

of such coils are necessary. The use of ferromagnetic toroidal cores leads to an increase in the magnitude of the signal and an improvement in the reproducibility of the pulse shape. When the beam is displaced parallel to the coils then, provided the dimensions of the coils in the direction of the displacement are greater than the possible displacements of the beam, the displacement of the beam will have no effect on the magnitude of the emf's induced in the two coils. When the coils are connected in series or in parallel (but not in a position), the induced emf's will add and the total signal will not change very much when the beam is displaced in any direction, provided the beam current remains constant. This method of connection, which is illustrated in the two lower diagrams in Fig.1, is used to measure the beam current and is similar to that described by Bess and Hanson (Ref.3). The system was designed with the help of "model" data obtained in experiments in which the charged particle beam was replaced by a straight line conductor carrying a current.

Card 3/5

87363

S/120/60/000/004/002/028
E032/E414

Measurement of the Position and Current of a Pulsed Beam of Charged Particles

In the final version of the device, the position of the beam could be determined to an accuracy better than 0.1 mm with the beam current greater than 1 mA, and pulse duration greater or equal to 0.5 psec. The current detector has a sensitivity of up to 20 mV/mA and may be used in measuring pulsed currents of 5 to 10 μ A per pulse. A sectional drawing of the position indicator is shown in Fig.3 (1 - coil of current indicator, 2 - coil of position indicator, 3 - glass tube, 4 and 5 - screens). A detailed description is given of the dimensions of the coils; the basic circuits of the ancillary electronics are reproduced. The authors thank G.N.Ivanov for taking part in the experiments and A.K.Val'ter for discussing the results obtained. There are 7 figures and 3 non-Soviet references.

ASSOCIATION: Fiziko-tekhnicheskiy institut AN UkrSSR
(Physicotechnical Institute AS UkrSSR)

SUBMITTED: June 5, 1959

Card 4/5

67953

S/120/60/000/004/002/028
E032/E414

Measurement of the Position and Current of a Pulsed Beam of Charged Particles

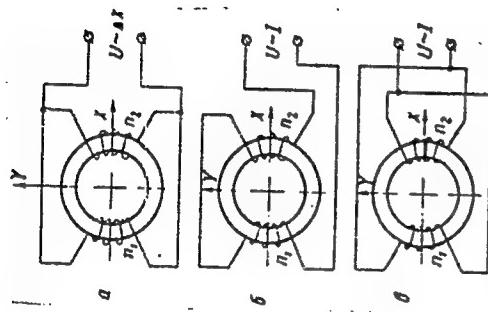


Рис. 1. Соединение обмоток катушек: а — для измерителя положения; б, в — для измерителя тока

Fig. 1.

Card 5/5

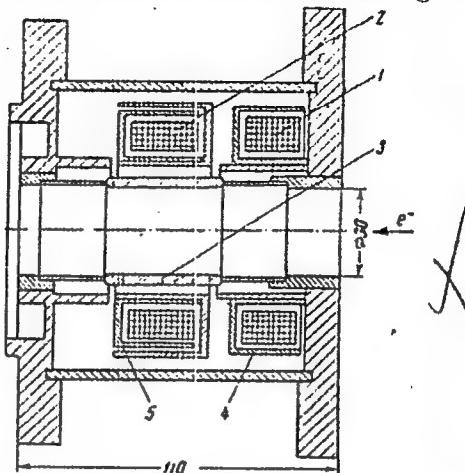


Рис. 3. Эскиз конструкции измерителя положения и тока пучка. 1 — катушка измерителя тока, 2 — катушка измерителя положения, 8 — стеклянная трубка, 4 и 5 — окна катушек

IVANOV, V.F.

[Fundamentals of the selection and calculation of the equipment of concrete mixing plants] Osnovy vybora i rascheta oborudovaniia betonosmesitel'nykh zavodo'. Krasnoiarsk, Krasnoiarskii politekhn. in-t, 1963. 79 p.
(MIRA 17:7)

IVANOV, V.F.

"Problems in demographic and public health statistics" by S.A.
Novosel'skii. Reviewed by V.F.Ivanov. Gig. i san. 25 no. 3:117
(MIRA 14:5)
Mr '60. (PUBLIC HEALTH—STATISTICS) (NOVOSEL'SKII, S.A.)

IVANOV, V. F.

Steam Turbines

Fast general overhauling of a turbine, Rab. energ., 1, no. 1, 1951.

9. Monthly List of Russian Accessions, Library of Congress, October 1951², Uncl.

IVANOV, V. F.

Steam Turbines

Two yeafs of turbine operation without general overhauling, Rab. energ., 1,
no. 2, 1951.

9. Monthly List of Russian Accessions, Library of Congress, October ² 1951, Uncl.

IVANOV, V. F.

Hot-water Heating

Screw cap for water-heater pipes, Rab. energ. 2 No. 4, 1952.

9. Monthly List of Russian Accessions, Library of Congress, July 1952, Uncl. ²

IVANOV, V. P.

Steam Boilers - Safety Appliances

Opening of the safety box valve. Rab. energ. 2 no. 4, 1952.

9. Monthly List of Russian Accessions, Library of Congress, July 19⁵/⁶, Uncl.
2

SOV/96-5E-6-21/24

AUTHOR:

Ivanov, V.F.

TITLE:

Reducing the starting time of a turbine type VPT-25-3
(Uskoreniye pustki turbiny VPT-25-3)

PERIODICAL:

Teploenergetika, 1958, . . . No.6. pp. 91-92 (USSR)

ABSTRACT:

At a Heat and Electric Power Station of Mosenergo, by making small changes in the thermal circuit, the starting time of a turbine type VPT-25-3 was shortened by 40%, with corresponding savings of fuel, etc. The old and new starting times are compared graphically in fig.1. The auxiliaries were supplied with medium-pressure steam from the line to the feed-pumps. Therefore, the ejectors and oil-pump could be started up and checked whilst the main steam line to the governor valves was being warmed up. Moreover, there was no need to keep the main steam line hot for ten hours after shut-down in order to be able to run the oil pump. The various detailed ways in which the starting period has been shortened are described. As a result of observations made during the work - in particular of longitudinal expansion of the turbine frame - the starting time after 4 - 5 hours shut-down has also been much reduced. There are 2 figures.

Card 1/1

1. Turbines--Performance 2. Turbine starters--Applications

SOV/91-58-12-7/20

AUTHOR: Ivanov, V.F., Assistant to the Workshop Head

TITLE: The Operation of the Thermolectric Power Plants' Turbine
Rooms at Lowered Electric Loads (Rabota turbinnykh tsekhov
TETs v usloviyakh snizhennykh elektricheskikh nagruzok)

PERIODICAL: Energetik, 1958, Nr 12, pp 15-16 (USSR)

ABSTRACT: During flood periods, thermolectric power plants to a certain extent play the role of peak power plants, using frequent starts and stops of the power units to aid hydropower plants. To ensure economic and safe operations of the thermolectric power plants on such occasions, one of the Mosenergo thermolectric power plants introduced several changes in its installations, and the start periods of the VPT-25-3 and VR-25-1 turbines were cut from 8 or 10 hours to 5.5 and 3.5 hours respectively. The author lists 3 problems which must still be solved to achieve efficient parallel operations of the hydro-

Card 1/2

SOV/91-58-12-7/20

The Operation of the Thermolectric Power Plants' Turbine Rooms at Lowered Electric Loads

and thermo-electric power plants: 1) the conservation of the thermoelectric power plants' equipment during short-period stops; 2) the use of low-pressure drains and blow-throughs; 3) the use of regeneration.

Card 2/2

IVANOV, V.F.

Improving the design of the supporting bearing of AT-25-1 turbines.
(MIRA 15:7)
Energetik 10 no.7:12-13 J1 '62.
(Bearings (Machinery))

PAKHOMOVA, N.B.; ARSAYEV, M.I.; IVANOV, V.F.; KUROCHKIN, S.S.;
MAMIKONYAN, S.V.

Apparatus for detecting coincidences of relativistic charged particles.
Nauch.-tekhn.sbor.Gos.izd-va lit. v obshch. atom. nauki i tekhn. no.4:
89-98 '62. (MIRA 16:10)

IVANOV, V.F.; DAMASKIN, B.B.; FRUMKIN, A.N.; IVASHCHENKO, A.A.; PESHKOVA, N.I.

Differential capacity curves of a mercury electrode at high
electrolyte concentrations. Elektrokhimiia 1 no.3 1979-284
Mr '65. (MIRA 18:12)

1. Moskovskiy gosudarstvennyy universitet i Tul'skiy
mekhanicheskiy institut.

L 47312-63

EPA(v)-2/ENT(1)/ESG(t)/WNA(s)-2

PLA/PLA

I

(c)

AT/IS

ACCESSION NR: AT5007922

S/0000/64/000/000/0295/0295

AUTHOR: Val'ter, A. K.; Grigor'yev, Yu. N.; Dudkina, I. M.; Ivnov, V. F.;
Il'in, O. G.; Koba, I. I.; Kondratenko, V. V.; Kocheshnikov, N. T.; Taretsenko, A.
S.; Terekhov, B. A.; Tolstoy, A. Ye.; Shenderovich, A. M.; Grishayev, I. A.

TITLE: The apparatus of the Physicotechnical Institute, Academy of Sciences,
Ukrainian SSR, for colliding electron beams with energies of 200 x 100 Mev for ex-
periments on the scattering of electrons on an electron

SOURCE: International Conference on High Energy Accelerators. Dubna, 1953
Trudy. Moscow, Atomizdat, 1964, 295-299

TOPIC TAGS: high energy accelerator, high energy plasma, particle beam, particle
physics, charged particle beam

ABSTRACT: Work on colliding electron beams in the Physicotechnical Institute,
Academy of Sciences, Ukrainian SSR, was begun in 1960. The existence of linear
electron accelerators was basic for the initiation of such work. At the first
stage, it was decided to stop at electron storage devices of 1.00 Mev energy, since
it was found that even at such comparatively small energies of the colliding beams

electron accelerators was built for the initiation of nuclear fusion. At the initial stage, it was decided to stop at electron storage devices of 100 Mev energy, since it was found that even at such comparatively small energies of the colliding beams

Card 1/5

L 47312-65

ACCESSION NR: AT5007922

many problems can be solved. The most convenient storage design is a system of race-tracks with a common linear section in which the collision of the two beams is effected. A distinctive property of the Institute's storage device is the great lengths of the linear sections, equal to 50 and 80 cm for a radius of revolution of 50 cm. The great length of one pair of linear sections in each of the rings was selected in order to provide for measurement of the minimum angle of scattering. Selection of a small radius of revolution was due to the requirement of minimum equilibrium dimensions of the beam and to the tendency to have it not too long time for damping of the beam oscillations. To localize the region of interaction, the beam orbits are distorted in the vertical plane by means of two "intersecting" magnets that create a homogeneous field in the radial direction. The magnets are arranged in the common linear section. The length of each of the "intersecting" magnets equals 10 cm, and the magnetic field strength is up to 1400 gauss. The magnets deflect the equilibrium orbit by 1 cm from the median plane. The quadrants have a constant magnetic field index of $n = 0.425$. The coupled magnets in the section that is common for both orbits have zero gradient; the index in the remaining sections is $n_1 = 0.450$. The stability of the Institute's system is characterized by a diagram showing field index m in the quadrants versus the field index n_1 in the coupled magnets. The regions of stability and resonance lines of various

"APPROVED FOR RELEASE: 03/20/2001 CIA-RDP86-00513R000619120017-4

ed by a diagram showing field index m in the quadrants around the field index 0.
in the coupled magnets. The regions of stability and resonance lines of various

Card 2/5

APPROVED FOR RELEASE: 03/20/2001 CIA-RDP86-00513R000619120017-4"

L 47312-65

ACCESSION NR: AT50G7922

orders are indicated in the diagram and discussed. The selected operating point is at a maximum distance from the resonances; in this case the frequencies of betatron radial and vertical (axial) oscillations are respectively equal to $\nu_r = 1.145$; $\nu_z = 0.6956$. The internal dimensions of the vacuum chamber were 100×40 mm. The determining problem here was the conditions governing the beam input into the storage device. The beam is fed to an inflector through a magnetic channel. The initial conditions are so chosen that the beam can bypass in the first six revolutions the inflector set a distance of 2.25 cm from the equilibrium orbit. The behavior of the storage device in the first six revolutions is described. In case the trailing edge of the magnetic field pulse lasts for three revolutions of the particles in the storage device, the introduction of particles into the chamber can also be prolonged in the course of three revolutions. In order to capture particles in the storage device it is necessary to create with the help of inflector magnets a magnetic field strength of $B_I = 1900$ oersteds, $B_{II} = 2030$ oersteds. The system of tolerances is evaluated on the assumption of the following parameters for the input beam: width $a = 0.5$ cm, height $b = 0.1$ m, angular divergences: radial $\Delta\gamma_r = 2 \cdot 10^{-3}$ and vertical $\Delta\gamma_z = 5 \cdot 10^{-4}$. Preliminary measurements indicate that this data can be realized in the case of the Institute's apparatus. The requirements on

Card 3/5

L 47312-65

ACCESSION NR: AT5007922

the stability of the magnetic field of the inflector arcs $M_1/M_2 = 108$. ^{II}/_{II}^s
= 3%. Taking into consideration the indicated quantities, the maximum values of
the curvature of the radial betatron oscillations will be equal respectively to
 $F_I = 2.8$ cm, $F_{II} = 4.1$ cm. According to computations, the equilibrium dimensions of
the beam must be $a_z = 0.04$ cm; $a_r = 0.2$ cm. Due to the quantum fluctuations in
synchrotron radiation, the longitudinal dimension of the particle bunch equals 40
cm for a gap voltage of about 1.5 kilovolts. The mean energy expended on an
electron per revolution, taking into account the coherent radiation, is equal to
220 electron-volts. The time of oscillation damping amounts to 100 msec. Alter-
nate injection of the beam of electrons in the ring is effected by three sector
magnets with double focusing. The introduction of a beam turned away from the ac-
celerator and with zero initial conditions is ensured by the application of a cy-
lindrical magnetic shield with a shielding coefficient varied along the length.
All the magnets are supplied with power from sources that have a current stability
of at least 0.02%. The report also discusses the vacuum chamber, voltage generator,
and a few other aspects of the apparatus. Orig. art. hand. 5 figures, 2 tables.

Card 4/5

L 47312-65

ACCESSION NR: AT5007922

ASSOCIATION: Fiziko-tehnicheskiy institut AN UkrSSR (Physical-technical Institute,
AN UkrSSR)

SUBMITTED: 26May64

ENCL: 00

MB CODE: BE, MB

NO REF Sov: 000

OTHER: 000

Card 5/5114

ROSHCHUPKINA, L.M.; KHONINA, V.F.; IVANOV, V.F.; IOFA, Z.A.

Origination of the catalytic current maxima in the electroreduction
of iron group metals on a mercury dropping electrode. Elektrokhimia
1 no.8:982-985 Ag '65. (MIRA 18:9)

1. Tul'skiy politekhnicheskiy institut i Moskovskiy gosudarstvennyy
universitet imeni M.V.Lomonosova.

IVANOV, V.F., inzh.; SALTEYSKIY, Z.L., gidrogeolog (g. Tashkent)

Construction of wells for vertical drainage. Gidr. i mel.
17 no.7:43-48 Jl '65. (MIRA 16:12)

IVANOV, V.F.

VIROVETS, A.M., professor; BARVENKO, Ye.I., inzhener; BENDOVSKIY, M.K., inzhener; GORELKIN, L.F., inzhener; DRIATSKAYA, E.M., inzhener; ZELICHENKO, L.B., inzhener; IVANOV, V.F., inzhener; KAMENSKIY, I.G., inzhener; KOSINOV, M.Ya., inzhener; LARIN, D.A., inzhener; MAUERER, V. G. inzhener; NEMTSEV, S.V., inzhener; SOLOV'YEVA, M.V., inzhener; PISHKIN, V.N.; RYTOV, A.V., redaktor; SHLENSKIY, I.A., tekhnicheskij redaktor.

[Tables of the rectangular coordinates of map frame angles and of map frame and area dimensions of trapezoids of topographic surveys, using the scale 1:5000; for latitudes 36°- 68°. Krasovskii's ellipsoid]
Tablitsy priamougol'nykh koordinat uglov ramok, razmerov ramok i ploschadei; trapetsii topograficheskikh s"emok masshtaba 1:5000. Dlia shirok ot 36°- 68°. Ellipsoid Krasovskogo. Moskva, Izd-vo geodezi-cheskoi lit-ry, 1953. 909 p. (MIRA 8:4)

(Surveying--Tables, etc.) (Coordinates) (Trigonometry—Tables, etc.)

IVANOV, Vitaliy Fedorovich; YEGOROV, L.P., redaktor; KUZ'MIN, G.M.,
tekhnicheskij redaktor.

[Accounting and technical record keeping in cartographic and
geodetic work] Uchet i tekhnicheskaja otchetnost' kartografo-
geodezicheskogo proizvodstva. Moskva, izd-vo geodezicheskoi
lit-ry, 1955. 119 p. [Microfilm] (MLRA 8:9)
(Accounting) (Surveying)

IVANOV, Vitaliy Fedorovich; NEMTSEV, Sergey Vasil'yevich; SHAMAROVA, T.A.,
redaktor izdatel'stva; KUZ'MIN, G.M., tekhnicheskij redaktor

[Organization and planning of topographical, geodetic and cartographic work] Organizatsiya i planirovanie topografo-geodezicheskogo i kartograficheskogo proizvodstva. Pod obshchei red. S.V.Nemtseva. Moskva, Izd-vo geodezicheskoi lit-ry, 1956. 186 p. (MLRA 10:2)
(Surveying)

Ivanov, V. F.

6-1-15/16

AUTHOR: Pavlov, V. F.

TITLE: On the Book by V. F. Ivanov and S. V. Nemtsev: "Organization and Planning of the Topographical-Geodetic and Cartographical Production" (O knige V. F. Ivanova i S. V. Nemtseva "Organizatsiya i planirovaniye topografо-geodezicheskogo i kartograficheskogo proizvodstva")

PERIODICAL: Geodeziya i Kartografiya, 1958, Nr 1, pp. 75 - 77 (USSR)

ABSTRACT: Published at the end of 1957. This book was admitted as a textbook for teaching at the topographical and technical institutes by the division of the schools at the GUGK MVD USSR (Central Office for Geodesy and Cartography in the Ministry of the Interior of USSR). A criticism is practiced here point by point and the faults in the book are pointed out. A thorough revision is recommended for the case of a new edition.

AVAILABLE: Library of Congress

Card 1/1

3(4)

PHASE I BOOK EXPLOITATION

sov/1988

Ivanov, Vitaliy Fedorovich

Sostavleniye tekhnicheskikh proyektov i smet na topografo-geodezicheskiye raboty (Technical Planning Drafts and Estimates for Topographic and Geodetic Surveys) Moscow, Geodezizdat, 1959. 230 p. 5,000 copies printed. Errata slip inserted.

Ed.: N. T. Zavarza; Tech. Ed.: V. V. Romanova; Ed. of Publishing House: T. A. Shamarova.

PURPOSE: This handbook is intended for personnel of aerogeodetic establishments who are responsible for planning and organizing the work.

COVERAGE: This book includes general and specific instructions in planning various types of projects in topographic, geodetic, gravimetric, and cartographic work. Instructions are included for estimating costs, materials, time, payroll, and other factors involved in a given project under various conditions of work.

Card 1/9

Technical Planning Drafts and Estimates (Cont.)

SOV/1988

Approximately 80 percent of the book is devoted to charts and tables which are used in computing or determining items used in planning a project. Among the tables are rates for transferring passengers and freight by various means of transportation, pay scales for various types of work, and the like. No personalities are mentioned. There are no references.

TABLE OF CONTENTS:

PART I. TECHNICAL PLANNING OF TOPOGRAPHIC AND GEODETIC WORK

Ch. I. Method of Planning the Work in Topographic and Geodetic Operations	4
Ch. II. Basic Data for Technical Planning and Estimating in Topographic and Geodetic Work	6
Ch. III. Types of Work for Which Technical Plans Are Made	8
Ch. IV. Summation of Topographic and Geodetic Work Included in One Technical Plan	10

Card 2/9

Technical Planning Drafts and Estimates (Cont.)	SOV/1988
Ch. V. Names and Standard Nomenclature of Technical Plans	11
Ch. VI. The Order in Which Technical Plans Are Compiled and Approved	12
Ch. VII. Technical Planning of Work for First, Second, Third, and Fourth Order Triangulation	15
Ch. VIII. Technical Planning of Work for First, Second, and Third Order Leveling	19
Ch. IX. Technical Planning for Topographic Surveys	21
Ch. X. Technical Planning for General Gravimetric (Pendulum) Survey	27
Ch. XI. Technical Planning for Cartographic Work	28
Ch. XII. Technical Planning for Computing Work	30
Card 3/9	

Technical Planning Drafts and Estimates (Cont.)

SOV/1988

PART II. ESTIMATING FOR TOPOGRAPHIC AND GEODETIC WORK

Ch. I. Estimating for Topographic, Geodetic, Gravimetric, and Cartographic Work	32
Ch. II. Direct Expenditures	33
Ch. III. Overhead Expenses	36
Ch. IV. Preliminary and Post-Completion Work	36
Ch. V. Forms for a Technical Plan and the Order of Their Completion	37
Ch. VI. Compiling Composite Estimates for Conducting Field and Office Work	38
Ch. VII. Compiling Composite Estimates for Preliminary and Post-Completion Work	41
Ch. VIII. Compiling Summaries of Material Needs	41

Card 4/9

Technical Planning Drafts and Estimates (Cont.) SOV/1988

Ch. IX. Making Detailed Breakdowns of the Composite Estimate of Field and Office Work	43
Ch. X. Making Detailed Breakdowns of Preliminary and Post-Completion Work	45
Ch. XI. Estimating for Timber Preparation Work	48

SUPPLEMENTS

1. Time norms for preliminary and post-completion work	54
2. Number of 18 X 18 cm aerial photos per 1000 sq km of area	57
3. Provisional norms for expenditure of materials for conducting topographic, geodetic, and cartographic work	58
4. Standards for determining the cost of automotive transportation and private land transportation (animal)	65

Card 5/9

Technical Planning Drafts and Estimates (Cont.)	SOV/1988
5. Composite table of the cost of supply days and supply months of hired land transportation	67
6. Calculation tables for determining the cost of transferring freight by railroad	71
Tablet 1. Rates for transferring freight in freight cars per Schedule No. 16 at the slow speed rate	71
Tablet 2. Rates (in rubles) for transferring light freight per Schedule No. 6	73
Tablet 3. Rates (in kopecks) for transferring freight at passenger speeds	78
Tablet 4. List of shortest rate-distances between basic freight stations of the USSR	83

Card 6/9

Technical Planning Drafts and Estimates (Cont.)	SOV/1988
7. Rates for transferring freight by river transporatation	87
8. Cost of transferring passengers and baggage on steamship lines of the Ministry of River Transporatation, RSFSR	105
9. Table of passenger ticket rates	110
10. Uniform rates for transferring freight by automotive transportation	113
Rates for intercity passenger bus service	115
11. Standards of weight for equipment and supplies and cost of packing for field parties of topographic and geodetic work	116
12. Individual pay and ration breakdown for field topographic and geodetic work	117

Card 7/9

Technical Planning Drafts and Estimates (Cont.)		SOV/1988
13.	Pay table breakdown for office work	119
14.	Prices of basic materials used in topographic and geodetic work	119
15.	Forest appraisal	126
16.	Tables of areas included in frames of topographic surveys and maps at scales of 1:2000, 1:5000, 1:10 000, 1:50 000, 1:100 000, 1:200 000, 1:300 000, and 1:500 000	132
17.	Unified norms for topographic and geodetic work per month Composition of parties in field topographic and geodetic work	152
18.	Standards for time spent in constructing geodetic markers including earthwork, timber processing, bark stripping, and hauling in summer conditions	178
		190

Card 8/9

IVANOV, Vitaliy Fedorovich

Organizing and planning topographic-geodetic and
cartographic work, by V.F. Ivanov and S.V. Ventsev.
New York, USFSR, 1960.

221 p. charts, tables. (JPRS: 6260)

Translated from the original Russian: Organizatsiya i planirovaniye topografo-geodetskogo i kartograficheskogo stroizhestva, Moscow, 1956.

Bibliographical footnotes.

VIROVTSIA, A.M., prof.; MAUYERER, V.G., inzh.; TROITSKIV, B.V., inzh.;
IVANOV, V.F., inzh.; PETROVA, Ye.F., inzh.; BARVENKO, Ye.I.,
inzh.; SHISHKIN, V.N., inzh.

[Tables of Gauss-Kruger coordinates for latitudes 32° - 80°
at $5'$ intervals and for longitudes 0° - 6° at $7\frac{1}{2}'$ intervals
and tables of side and area dimensions of trapezoids in topo-
graphic surveys; Krasovskii's ellipsoid] Tablitsy koordinat
Gaussa-Kriugera dlia shirok ot 32° do 80° cherez $5'$ i dlia
dolgot ot 0° do 6° cherez $7\frac{1}{2}'$ i tablitsy razmerov ramok i
ploshchadei trapetsii topograficheskikh s"emok ellipsoid
Krasovskogo. 2. izd., ispr. i dop. Moskva, Izd-vo geodez.
lit-ry, 1961. 512 p. (MIRA 15:9)

1. Russia (1923- U.S.S.R.) Glavnoye upravleniye geodezii i
kartografii.

(Coordinates)

AUTHOR:

Ivanov, V. F. (Deputy Chief Fitter) 130-5-19/22

TITLE:

Organisation of Repair Services at Metallurgical Works.
(Organizatsiya remontnoy sluzhby na metallurgicheskikh zavodakh).

PERIODICAL:

"Metallurg" (Metallurgist) 1957, No.5, pp.36-38 (USSR).

ABSTRACT:

The author discusses the organisation of maintenance and repair work at some of the Soviet iron and steel works. Although complete centralisation is not, in the author's opinion practicable, experience at, for example, the Magnitogorsk metallurgical combine and the "Azovstal'" works has shown the advantages of centralisation. Three fundamental forms of a centralised system are proposed: group repair workshop as adopted at Magnitogorsk; a single repair-fitting shop with specialised repair sections; a single repair-mechanical workshop. The first type is the most efficient, but can be recommended only for the largest iron and steel works. For many large and medium-size works the second is preferable. The third is recommended for works with a few small shops. Regions containing metallurgical works should have specialised repair and construction organisations at hand for major operations.

Card 1/2